

Diffuse Reflectance Standards

SphereOptics Diffuse Reflectance Standards are made from our proprietary Zenith reflectance material. This highly reflecting, PTFE-based material is resistant to heat, humidity and exposure to high levels of radiation, making it ideal for use as reflectance standards and calibration targets.

Our line of gray scale standards are generally used to determine the linearity of optical detector systems used in colorimeters, spectrophotometers and densitometers. Our diffuse 99% standard is used industry-wide for calibration of sphere systems, photometers, optical equipment, and spectrophotometers.

Calibration

Standards are available uncalibrated, or calibrated. Calibrations cover the UV/VIS, UV/VIS/NIR or NIR wavelength regions with calibration data in 20 or 50 nm increments. Data is provided in print and electronic formats. Custom calibrations are available. Please see our ordering information for specifics on our calibrations.

SphereOptics maintains calibration laboratories in the United States and Germany with standards traceable to both the National Institute of Standards and Technology (NIST) and Physikalisch Technische Bundesanstalt (PTB).

Ordering information

Standards are available in 2 inch (50 mm) and 1.25 inch (30 mm) diameters with reflectance values ranging from our high reflectance 99% to a 25% gray scale. Reflectance values include 99%, 70%, 65%, 50%, 40%, 30% and 25%. Standards are sold individually or in sets of two or four standards with varying reflectances. Each standard is packaged in a durable cup style holder with a protective cover.

OEM and Custom Standards

We welcome the opportunity to quote on custom and OEM reflectance standards. Please contact our sales engineering department for capabilities information.

FEATURES


- High Reflectance
- Durable, Cleanable
- NIST Traceable Calibration

APPLICATIONS

- Calibration of
 - Sphere Systems
 - Photometers
 - Radiometers
 - Densitometers
 - Optical Equipment
 - Spectrophotometers
- Test Linearity of
 - Detector Systems
 - Colorimeters
 - Densitometers
 - Spectrophotometers




TYPICAL REFLECTANCE

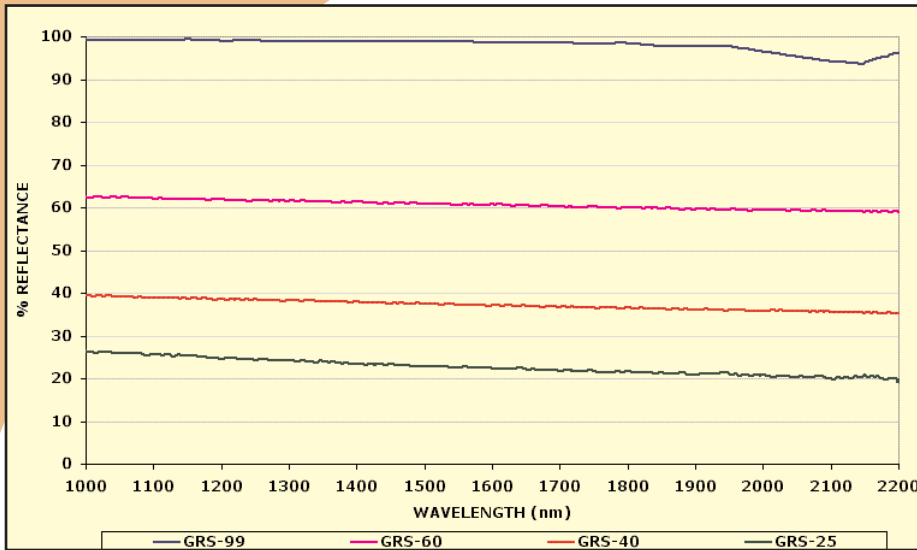

TYPICAL REFLECTANCE GRAY SCALE STANDARDS SET

Available with reflectance values of 99, 60, 40 and 25%


Calibrated from 1000 to 2200 nm with calibration data provided in 20 nm steps

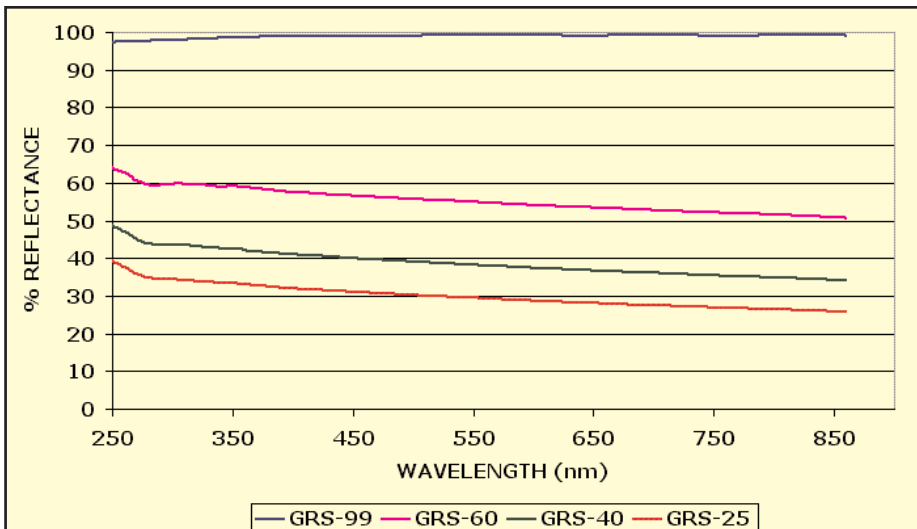

TYPICAL REFLECTANCE UV/VIS GRAY SCALE STANDARDS SET

Available with reflectance values of 99, 65, 50 and 30%

Calibrated from 250 to 850 nm with calibration data provided in 20 nm steps.

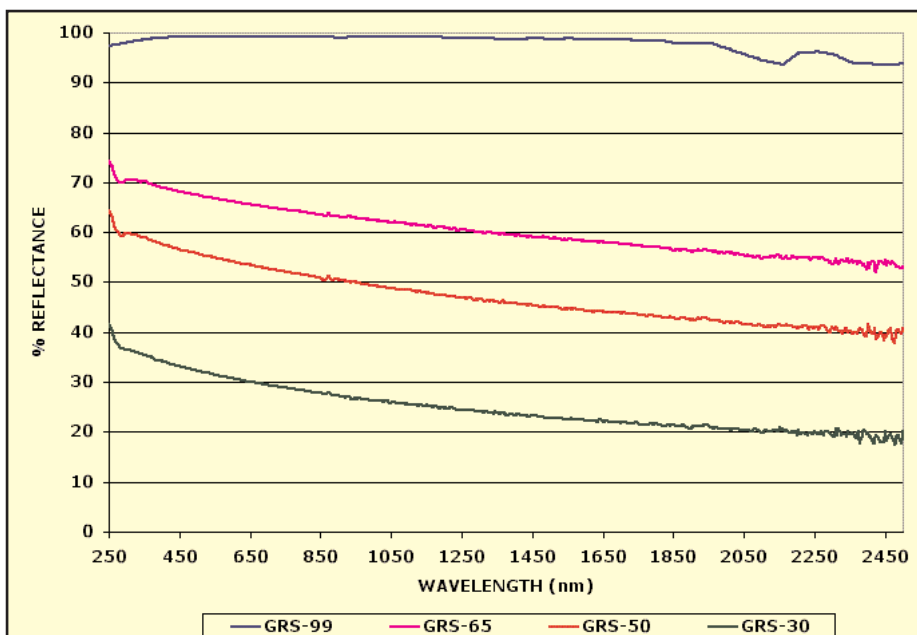

TYPICAL REFLECTANCE UV/VIS-NIR GRAY SCALE STANDARDS SET

Available with reflectance values of 99, 75, 50 and 25%

Calibrated 250 to 2500 nm with calibration data provided in 50 nm steps.

Other reflectivities are available upon request.

ORDERING INFORMATION - STANDARDS SETS

Order Number	Wavelength Range	Diameter	Number of Standards	Reflectance Values
SG 3086	250 to 2500 nm	2 in (50 mm)	Two (2)	99, 50%
SG 3087	250 to 2500 nm	1.25 in (30 mm)	Two (2)	99, 50%
SG 3088	250 to 2500 nm	2 in (50 mm)	Four (4)	99, 70, 50, 25%
SG 3089	250 to 2500 nm	1.25 in (30 mm)	Four (4)	99, 70, 50, 25%
SG 3090	250 to 860 nm	2 in (50 mm)	Two (2)	99, 50%
SG 3091	250 to 860 nm	1.25 in (30 mm)	Two (2)	99, 50%
SG 3092	250 to 860 nm	2 in (50 mm)	Four (4)	99, 65, 50, 30%
SG 3093	250 to 860 nm	1.25 in (30 mm)	Four (4)	99, 65, 50, 30%
SG 3094	1000 to 2200 nm	2 in (50 mm)	Two (2)	99, 40%
SG 3095	1000 to 2200 nm	1.25 in (30 mm)	Two (2)	99, 40%
SG 3096	1000 to 2200 nm	2 in (50 mm)	Four (4)	99, 60, 40, 25%
SG 3097	1000 to 2200 nm	1.25 in (30 mm)	Four (4)	99, 60, 40, 25%

ORDERING INFORMATION - INDIVIDUAL STANDARDS

Order Number	Wavelength Range	Diameter	Reflectance Value
SG 3051	250 to 2500 nm	2 in (50 mm)	99%
SG 3052	250 to 2500 nm	1.25 in (30 mm)	99%
SG 3069	250 to 2500 nm	2 in (50 mm)	70%
SG 3070	250 to 2500 nm	1.25 in (30 mm)	70%
SG 3071	250 to 2500 nm	2 in (50 mm)	50%
SG 3072	250 to 2500 nm	1.25 in (30 mm)	50%
SG 3073	250 to 2500 nm	2 in (50 mm)	25%
SG 3074	250 to 2500 nm	1.25 in (30 mm)	25%
SG 3053	250 to 860 nm	2 in (50 mm)	99%
SG 3054	250 to 860 nm	1.25 in (30 mm)	99%
SG 3055	250 to 860 nm	2 in (50 mm)	65%
SG 3056	250 to 860 nm	1.25 in (30 mm)	65%
SG 3057	250 to 860 nm	2 in (50 mm)	50%
SG 3058	250 to 860 nm	1.25 in (30 mm)	50%
SG 3059	250 to 860 nm	2 in (50 mm)	30%
SG 3060	250 to 860 nm	1.25 in (30 mm)	30%
SG 3061	1000 to 2200 nm	2 in (50 mm)	99%
SG 3062	1000 to 2200 nm	1.25 in (30 mm)	99%
SG 3063	1000 to 2200 nm	2 in (50 mm)	60%
SG 3064	1000 to 2200 nm	1.25 in (30 mm)	60%
SG 3065	1000 to 2200 nm	2 in (50 mm)	40%
SG 3066	1000 to 2200 nm	1.25 in (30 mm)	40%
SG 3067	1000 to 2200 nm	2 in (50 mm)	25%
SG 3068	1000 to 2200 nm	1.25 in (30 mm)	25%

CALIBRATION

- UV-VIS Calibrations are from 250 nm to 850 nm with calibration data provided in 20 nm steps.
- UV-VIS-NIR Calibrations are from 250 to 2500 nm with calibration data provided in 50 nm steps.
- NIR Calibrations are from 1000 to 2200 nm with calibration data provided in 20 nm steps.

SphereOptics also offers recalibration services that are traceable to national laboratory standards.



www.sphereoptics.com

USA

SphereOptics, LLC
Tel: 603-746-2000 • US Sales 858-695-2895
Fax: 603-746-3007
Email: sales@sphereoptics.com

GERMANY

SphereOptics GmbH
Tel: +49 (0) 7556 929 9666
Fax: +49 (0) 7556 50108
Email: infode@sphereoptics.com

FRANCE

SphereOptics SARL
Tel: +33 (0) 1 69 07 21 84
Fax: +33 (0) 1 69 07 71 38
Email: infofr@sphereoptics.com